


# SiSiB<sup>®</sup> FF9020-100

Fluoro Silicone Fluid 100cSt

## CHEMICAL NAME

Trimethyl terminated poly(methyl-trifluoropropyl)siloxane

## CHEMICAL STRUCTURE

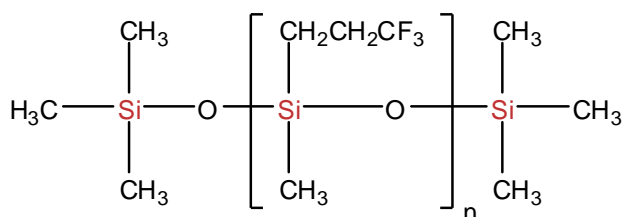

## INTRODUCTION

SiSiB<sup>®</sup> FF9020 is a 100% active fluorosilicone polymer.

Many advantages of fluorocarbons and silicones are combined in fluorosilicones, like:

- Efficient and persistent antifoam
- Insoluble in chlorinated solvents
- Resistant to chemicals and oxidation
- Low surface tension
- High flash point

## TYPICAL PHYSICAL PROPERTIES

Color and Appearance	Colorless to straw clear liquid
CAS No.	63148-56-1
Viscosity <sub>[25°C]</sub>	100cst
Density <sub>[25°C]</sub>	1.25
Refractive Index <sub>[25°C]</sub>	1.378
Flash Point	>240°C

Remark: Other viscosity levels can be made upon request.

## APPLICATIONS

# SINOPCC GROUP

AddSil, CoatSil, Kolark, PowSil, SinoSil, SiSiB, WinSil:  
Trademark of SINOPCC Group Limited or its affiliated.  
© 2018 SINOPCC Group Limited. All rights reserved.  
For further information, please see [www.SiSiB.com](http://www.SiSiB.com).

# SiSiB<sup>®</sup> FF9020-100

## *Fluoro Silicone Fluid 100cSt*

SiSiB<sup>®</sup> FF9020 is an excellent lubricant under extreme pressure applications.

SiSiB<sup>®</sup> FF9020 can be used in solvent antifoaming in the chemical and petroleum industries.

SiSiB<sup>®</sup> FF9020 is suitable for foam control in solvent systems where conventional polydimethylsiloxane fluids are soluble and promote foam.

SiSiB<sup>®</sup> FF9020 can be used for oil and gas separation.

### PACKING AND STORAGE

SiSiB<sup>®</sup> FF9020 fluid is supplied in 20Kg, 50Kg, 200Kg steel drum or fluorinated drum.

In the original unopened packaging, SiSiB<sup>®</sup> FF9020 fluid has a shelf life of 2 years in a dry and cool place.

### NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: [support@SiSiB.com](mailto:support@SiSiB.com).