


# SiSiB<sup>®</sup> MF2010-0.65

PDMS Silicone Fluid 0.65cSt

## CHEMICAL STRUCTURE

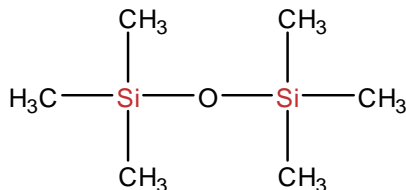

## INTRODUCTION

SiSiB<sup>®</sup> MF2010-0.65 fluid is 0.65cSt disiloxane. It is clear, tasteless, essentially odorless and non-greasy.

## THE MOST IMPORTANT FEATURES

- Highly volatile carrier
- Compatible with wide range of lipophilic cosmetic ingredients.
- Low surface tension.
- Excellent spreading.
- Leaves no residue or build up.
- Transient effect.

## TYPICAL PHYSICAL PROPERTIES

CAS No.	107-46-0
EINECS No.	203-492-7
Formula	C <sub>6</sub> H <sub>18</sub> OSi <sub>2</sub>
Molecular Weight	162.38
Boiling Point	99°C [760mmHg]
Flash Point	-1°C
Viscosity	0.65cSt.
Appearance	Clear liquid
APHA	10
Density <sub>25/25°C</sub>	0.764
Refractive Index	1.3774 [20°C]
Purity:	Min.99.0%

# SiSiB<sup>®</sup> MF2010-0.65

*PDMS Silicone Fluid 0.65cSt*

## APPLICATIONS

SiSiB<sup>®</sup> MF2010-0.65 fluid can be used as a base fluid in a number of personal care products with excellent spreading and unique volatility characteristics.

SiSiB<sup>®</sup> MF2010-0.65 fluid can be used in antiperspirants, deodorants, hair sprays, cleansing creams, skin creams, lotions, bath oils, suntan products, nail polishes.

## PACKING AND STORAGE

SiSiB<sup>®</sup> MF2010-0.65 fluid is supplied in 150Kg steel drum.

In the original unopened packaging, SiSiB<sup>®</sup> MF2010-0.65 fluid has a shelf life of 24 months when stored at ambient temperatures. The product does not freeze and there are no restrictions on storage.

## NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: [support@SiSiB.com](mailto:support@SiSiB.com).