


SiSiB[®] PC9761

1H,1H,2H,2H-Nonafluorohexyltrimethoxysilane

CHEMICAL STRUCTURE

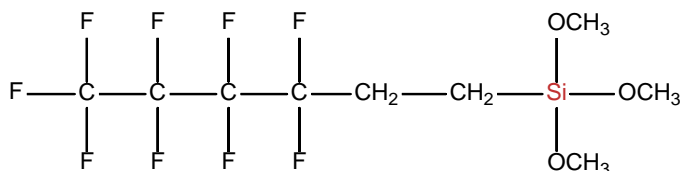

INTRODUCTION

SiSiB[®] PC9761 is a bifunctional silane possessing hydrolysable inorganic alkoxysilyl groups and a fluoroalkyl chain.

In the presence of water, the alkoxy groups of SiSiB[®] PC9761 will hydrolyze, producing reactive silanol groups that can be combined with various inorganic substrates, forming Si-O-base bonds on the surface, and further forming two-dimensional and three-dimensional network structures. .

Fluoroalkyl functional groups provide a low-energy surface but extremely poor wettability, providing excellent hydrophobic and oleophobic surface properties.

TYPICAL PHYSICAL PROPERTIES

CAS No.	85877-79-8
EINECS No.	468-970-1
Formula	C ₉ H ₁₃ F ₉ O ₃ Si
Molecular Weight	368.27
Boiling Point	69°C / 15mmHg
Flash Point	71°C
Color and Appearance	Colorless clear liquid
Density _{25/25°C}	1.335
Refractive Index	1.3380 [25°C]
Min. Purity	98.0%

APPLICATIONS

SINOPCC GROUP

AddSil, CoatSil, Kolark, PowSil, SinoSil, SiSiB, WinSil:
Trademark of SINOPCC Group Limited or its affiliated.
© 2023 SINOPCC Group Limited. All rights reserved.
For further information, please see www.sinopcc.com.

SiSiB[®] PC9761

1H,1H,2H,2H-Nonafluorohexyltrimethoxysilane

SiSiB[®] PC9761 can be applied in a wide variety of commercially important applications include:

- Treatment of automotive glass
- Anti-soiling, water-repellent, UV-resistant coating of float glass
- Additive for sol-gel coatings
- Anti-graffiti and easy-to-clean coatings
- Adhesion promoter for fluoropolymers (paints, coatings etc.)
- Synthesis of fluorosilicones
- Coating of pigments
- CVD processes

PROCESSING

Surfaces must be absolutely clean and degreased before treatment! The surface can be ideally activated with cerium oxide.

- Primer treatment (e.g. automotive glass)
1. Dilute SiSiB[®] PC9761 silane to a concentration of about 1% (wt) with a suitable solvent (for example: iso-propanol),
 2. Add 2-10% deionized water of pH 3 (adjusted with acetic acid or hydrochloric acid solution).
 3. Stir the solution for about 5 hours and then it is ready to use, but must be used within one day.

The substrate can be treated by dipping, spraying, curtain coating, painting and polishing. The resulting polysiloxane film is completely invisible and does not cause any optical damage to the substrate.

PACKING AND STORAGE

SiSiB[®] PC9761 is supplied in net weight 1Kg bottle, 5Kg/25Kg pail.

In the unopened container SiSiB[®] PC9761 has a shelf life of one year.

NOTES

SiSiB[®] PC9761

1H,1H,2H,2H-Nonafluorohexyltrimethoxysilane

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: silanes@SiSiB.com.